

Portable Incremental Type with Handle

Portable incremental type of Rotary encoder with handle

■ Features

- Suitable for manual pulse input type such as Numerically controlled or Milling machinery
- Emergency ground switch, enable switch are available
- Rotary switch for 6 Position, 4 Position

■ Application

- Industrial tooling machinery

⚠ Please read "Caution for your safety" in operation manual before using.



■ Ordering information

ENHP	100	1	L	5
Series	Pulse/1 Revolution	Clickstopper position	Control output	Power supply
Portable encoder with handle	100	1 : Normal "H" 2 : Normal "L"	L : Line driver output	5 : 5VDC ±5%

■ Specifications

Item		Movable incremental type of Rotary encoder with handle	
Resolution (P/R)		(Note1) 100P/R	
Electrical specification	Output phase	A, $\bar{A}$, B, $\bar{B}$	
	Phase difference of output	Phase difference between A and B : $\frac{T}{4} \pm \frac{T}{8}$ (T=1 cycle of A phase)	
	Rotary switch output	BCD Code output • Axis (X, Y, Z, A, B) • Rate (R1, R2, R3)	
	Control output	• Low $\Rightarrow$ Load current : Max. 20mA, Residual : Max. 0.5V • High $\Rightarrow$ Load current : Max. -20mA, Output voltage : Min. 2.5V	
	Line driver output		
	Response time (Rise/Fall)	Max. 0.5 μ s (Measuring condition $\Rightarrow$ I sink = Max. 20mA)	
	Power supply	5VDC ±5% (Ripple P-P : Max. 5%)	
	Current consumption	Max. 50mA (disconnection of the load)	
	Max. Response frequency	10kHz	
	Insulation resistance	Min. 100M Ω (at 500VDC)	
Mechanical specification	Dielectric strength		750VAC 50/60Hz for 1 minute (Between all terminals and case)
	Connection		25Pin D-SUB of connector type
	Starting torque	Max. 1kgf • cm (0.098N • m)	
	Shaft loading	(Note2) Radial : 2kgf, Thrust : 1kgf	
Max. allowable revolution		Max. 200rpm (Normal), 600rpm (Peak)	
Vibration		1.5mm amplitude at frequency of 10 ~ 55Hz in each of X, Y, Z directions for 2 hours	
Shock		Max. 50G	
Ambient temperature		-10 ~ 70°C (at non-freezing status), Storage: -25 ~ 85°C	
Ambient humidity		35~85%RH, Storage: 35~85%RH	
Protection		IP67 (IEC standard) for Box	
Cable		ϕ 5mm, 18P, Length : 8m, Spring code cable	
Unit weight		Approx. 730g	

※ **(Note1)** Not indicated type is available to customize.

※ **(Note2)** Max. allowable revolution $\geq$ Max. response revolution 【Max. response revolution (rpm) = $\frac{\text{Max. response frequency}}{\text{Resolution}} \times 60 \text{ sec}$ 】

(A) Counter

(B) Timer

(C) Temp. controller

(D) Power controller

(E) Panel meter

(F) Tacho/Speed/Pulse meter

(G) Display unit

(H) Sensor controller

(I) Switching power supply

(J) Proximity sensor

(K) Photo electric sensor

(L) Pressure sensor

(M) Rotary encoder


(N) Stepping motor & Driver & Controller

(O) Graphic panel

(P) Production stoppage models & replacement


ENHP Series

Control output diagram

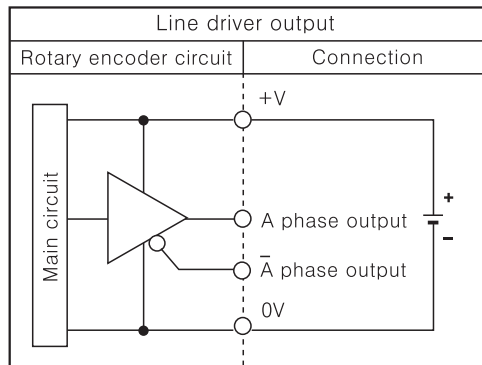


※The output circuit of A, $\bar{A}$, B, $\bar{B}$ phase is same.

Output waveform

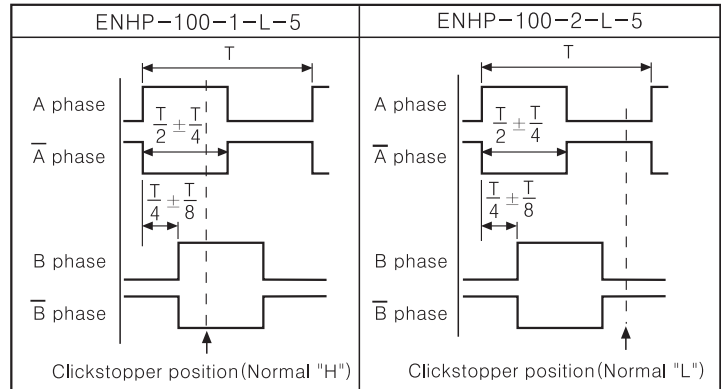

※Clickstopper position Normal "H" or Normal "L" : It shows the waveform when the handles is not stopped.

Connections

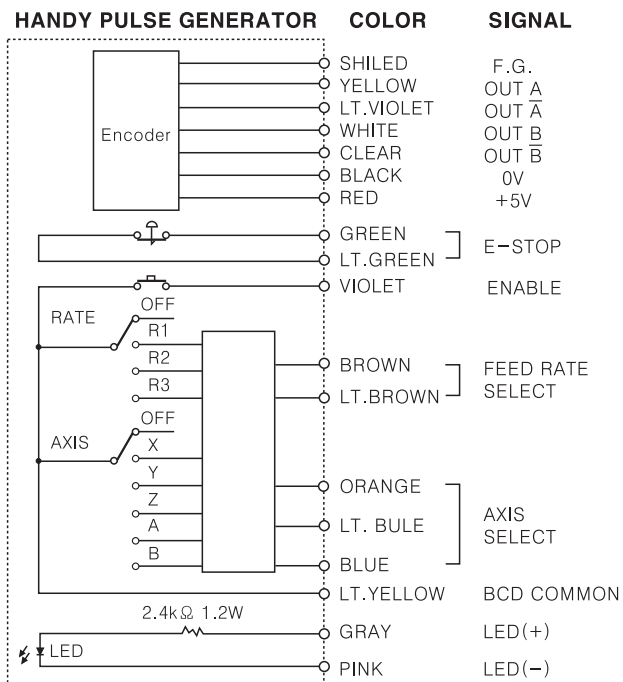

Pin No.	Function
1	OUT A
2	OUT $\bar{A}$
3	OUT B
4	OUT $\bar{B}$
5	GND
6	+V
7	N.C
8	E-STOP(L+)
9	E-STOP(L-)
10	ENABLE
11	FEED RATE
12	SELSECT
13	AXIS
14	SELECT
15	BCD COMMON
16	N.C
17	N.C
18	LED(+)
19	LED(-)
20	N.C
21	N.C
22	N.C
23	N.C
24	N.C
25	N.C


AXIS SELECT

AXIS	15	14	13
OFF	0	0	0
X axis	0	0	1
Y axis	0	1	0
Z axis	0	1	1
A axis	1	0	0
B axis	1	0	1

FREE RATE SELECT

RATE	12	11
OFF	0	0
R1	0	1
R2	1	0
R3	1	1

Dimensions

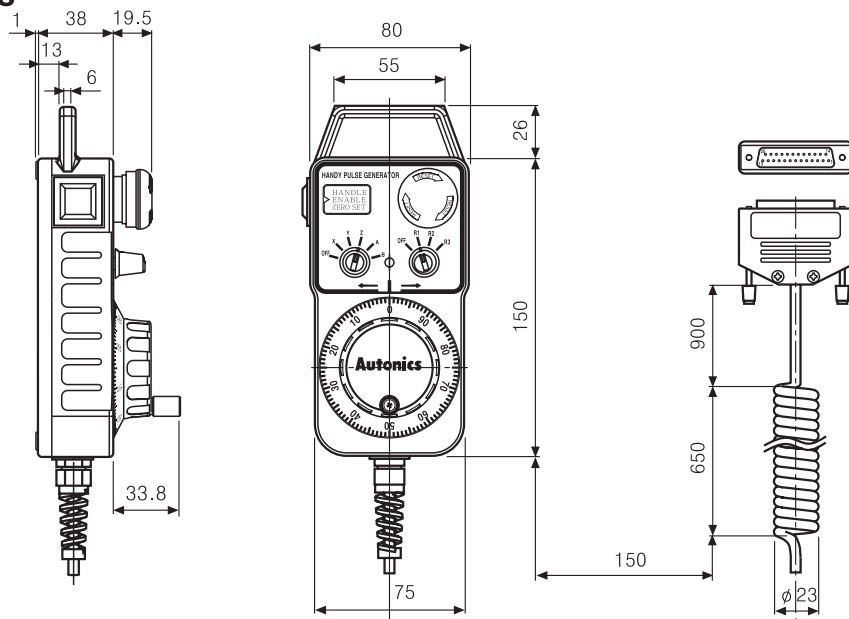

(Unit:mm)