

KEYENCE

NEW

Dual Display Digital Fibreoptic Sensor
FS-V20 Series



World's First Fibreoptic Sensor
with Dual Digital Display



VISUAL²

Dual Display Digital Fibreoptic Sensor
FS-V20 Series

State-of-the-Art

KEYENCE's Digital Fibreoptic Sensors continue to develop in pursuit of State-of-the-Art performance



Dual Digital Display Monitor

Industry's First

Simple and reliable settings

>>>> Page 4

Once again KEYENCE has pulled ahead of everyone else in fibreoptic sensor development. The FS-V20 Digital Fibreoptic Sensor incorporates a Dual Digital Display Monitor, letting you view both the Preset and Current Values. It also offers simpler and more reliable settings than any other fibreoptic sensor. (Patent pending)



Examples of how the FS-V20's Dual Digital Displays can be configured.

- ▶ Preset Value and Current Value
- ▶ Peak Value and Bottom Value
- ▶ Mode Status Display
- ▶ And more



VISUAL²

Dual Display Digital Fibreoptic Sensor
FS-V20 Series


Most Powerful Beam

Up to 1800mm (Thrubeam)

Longer detecting distance in harsh environments

>>>> Page 6

The FS-V20's newly developed processor delivers up to 4 times the power of conventional KEYENCE fibreoptic sensors. This enhanced power ensures stable detection in harsh conditions, such as when the detecting distance is too short due to a dark-coloured target or when the sensor needs to be mounted in a dirty or dusty environment. The FS-V20's ULTRA High Power overcomes such challenges, eliminating sensing problems that arise from insufficient power.




Highest Speed and Accuracy

Response Speed: 50µs

Without being influenced by temperature or environmental changes

>>>> Page 7

The FS-V20 is the world's first through-beam sensor that detects gold wires as thin as 0.005mm in diameter, and the built-in digital amplifier ensures the industry's highest response speed of 50µs. Not only fast, the FS-V20 provides the highest precision as well.




Stable Detection Over a Longer Lifetime

Revolutionary devices for more stable detection

>>>> Page 8

Fibreoptic sensors must maintain even light emissions, since any fluctuation will lead to unstable detection. The FS-V20's 4-element red LED gives it a long lifetime, while the S-APC circuit keeps light emissions even. (Patent pending)

Stable and Longer
Lifetime



Industry's First Dual Digital Display Monitor

Benefits Provided by Dual Digital Display Monitor




Controlling the subtle tension of transparent film

Preset Value and Current Value

Preset Value can be changed while monitoring the amount of light received.

Unlike conventional sensors, the FS-V20 does not make you choose between Preset Value and Current Value display. This means that you can make Preset Value changes while monitoring the amount of light received, which facilitates reliable sensor configuration. Preset Value and Excess Gain (%) can also be displayed during operation.

1234 4095
Preset Value Current Value

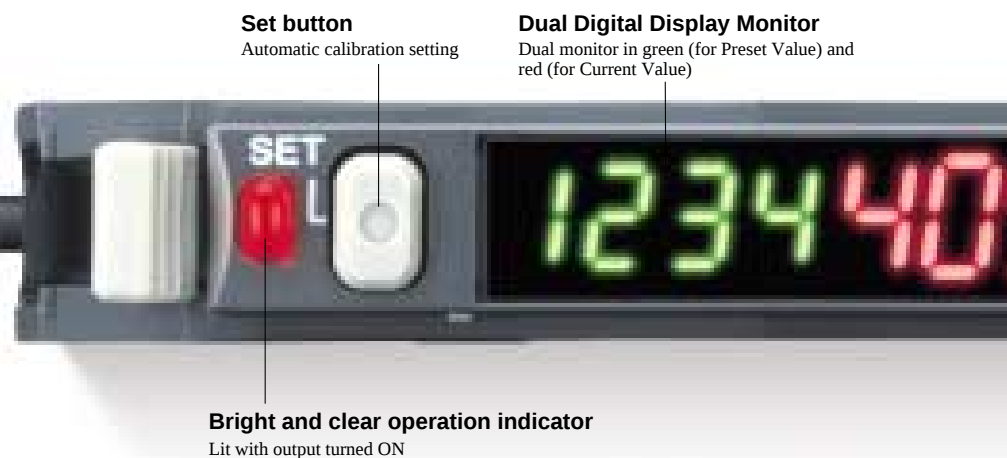

Power mode selection

FINE mode	F inE 1637
TURBO mode	turb 32 18
SUPER mode	SuPr 4095

Timer function setting

OFF delay timer	offd 200
On delay timer	on-d 300
One shot timer	Shot 100

Mode Status Display


Easy-to-understand, simple operation.
The Dual Digital Display Monitor displays current amplifier mode.

Conventional, single-monitor models do not allow you to check amplifier mode status while making setting changes. The FS-V20's Dual Digital Display Monitor gives you full access to amplifier status for easy setup, even for operators new to the product.


Peak Value and Bottom Value

The Hold function makes it possible to display both peak and bottom values simultaneously.

Unlike single-monitor sensors, the FS-V20 does not make you choose one display at the expense of another. Its Dual Digital Display Monitor is ideal for the detection of high-speed targets or for checking fluctuations in received light intensity.



Counting chip components travelling at high speed

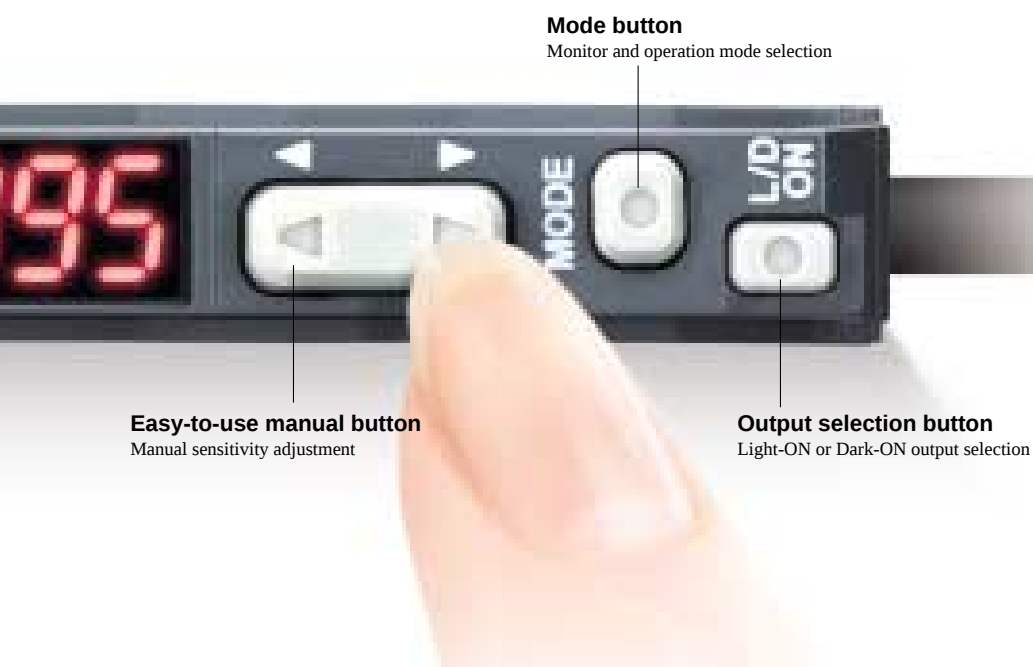

Power Saving Function


Ensures lowest power consumption in its class.

The digital display turns OFF if the sensor is not operated for 30sec. At this time power consumption will not exceed 480mW even if a number of sensors are used in combination.

ECO-HALF mode provides a low energy option with display.




The red indicator is lit at the time of detection.



The green indicator is lit when nothing is detected.

Auto Display-OFF Function (480mW Max.)

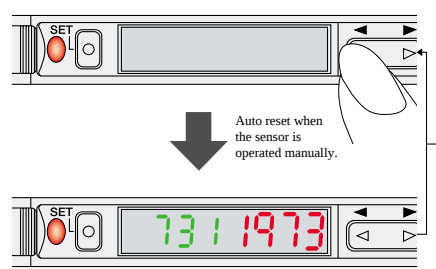


The display will shut OFF after 30sec.

Industry's Most Powerful Beam

Ensures easy optical axis adjustments and stable detection while in operation.


A newly developed processor ensures the high power of the FS-V20 Series. High power is important because it helps ensure stable detection, and this enables the FS-V20 to provide reliable detection in all environments (in particular where thin fibres are used), even in poor or deteriorating conditions.

4 times the power of conventional fibreoptic sensors

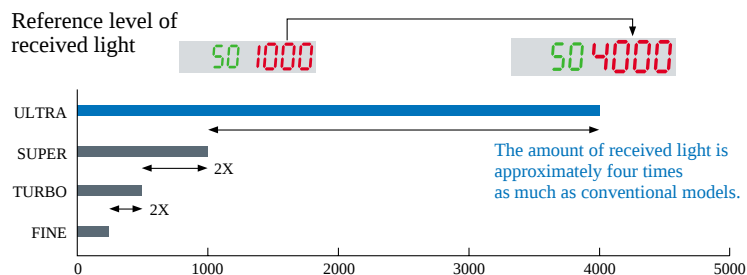

A sensing distance of 1500mm is achieved by the standard FU-7F Thrubeam Fibre Unit.

Industry's Longest Detecting Distance

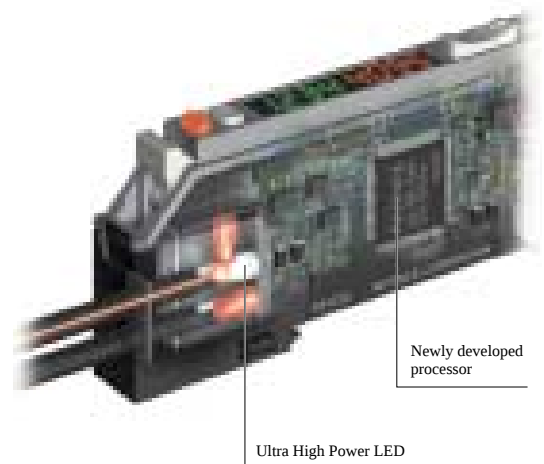

Advantages and benefits of ULTRA High-Power

ULTRA 4095

Longer detecting distance

When detecting dark-coloured targets with reflective-type sensors, the sensitivity must be set as high as possible to obtain a greater detecting distance. Insufficient sensor power may lead to unstable detection. The FS-V20's ULTRA High Power ensures both a longer detecting distance and a wider margin for stable detection.



Detecting dark coloured targets at a long distance

Use in harsh environments

Long usage gradually affects a sensor's sensitivity as dust and dirt accumulate on the sensor head. Without enough power, the sensor may fail in harsh conditions where water, oil, or mist are present. The FS-V20's ULTRA High Power means that stable detection is not at the mercy of harsh environmental conditions.



Detecting labels in a dusty environment

Easy optical axis adjustment

It is difficult to find the optimum optical axis position, especially when using a thin-type fibre unit. The FS-V20's ULTRA High Power ensures both a longer detecting distance and easy optical axis adjustment, even with thin-type fibre units.




Detecting connector pins with thin-sleeve type heads

Industry's Highest Speed and Accuracy

Provides a wider range of applications than conventional models with the industry's highest speed and accuracy.

In addition to its ULTRA High Power mode, the FS-V20 has 2 other sensing modes that solve problems such as the failure of sensitivity settings due to slow response and received light saturation. These modes expand the FS-V20's sensing capabilities by allowing it to avoid such problems.

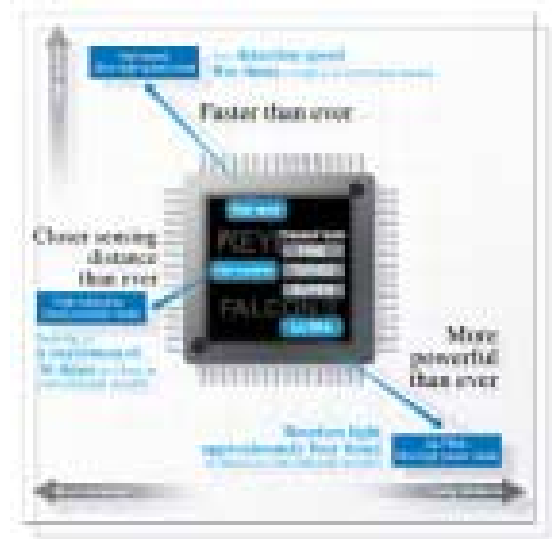

Ultra High-speed Mode- Highest Response


Industry's Highest Speed

HSP 1234

The industry's highest response speed of 50μs for digital sensors

The industry-best response speed of 50μs is achieved without adversely affecting the FS-V20's easy-to-configure ability. The unit detects up to 10,000 targets per second, while making it possible to monitor the digital value settings for the targets.

* Conventional models have a response speed of 250μs and perform a maximum of 2,000 counts per second.

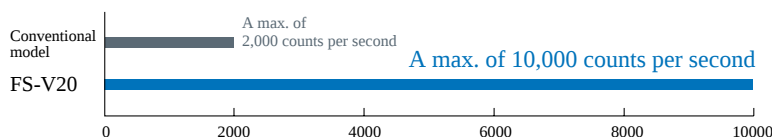

Detecting register marks moving at high speed



Close-proximity Mode- High Resolution

New Theory

FE 65520

With no saturation in close proximity


Saturation makes it difficult to make sensitivity adjustment with conventional high-power digital sensors (i.e., the incident level is set to 4,095) when sensing targets in close proximity. The FS-V20's high-resolution mode expands the maximum incident level to 65,520 from the conventional 4,095 for sensing close targets. (Patent pending.)

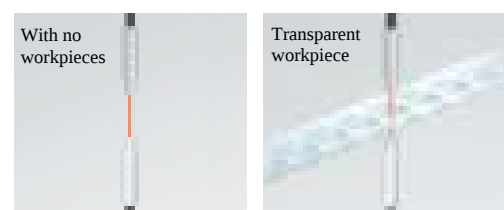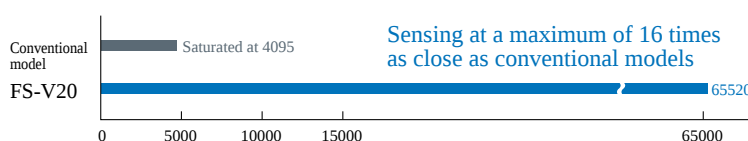

Stable Detection Over a Long Lifetime

Provided with two new devices for stable, high-precision detection


It is essential for fibreoptic sensors to be able to maintain stable light emissions for long periods of time. Fluctuations or decreased light emissions over a long period may compromise high-precision detection. The FS-V20's 4-element red LED and S-APC function solve these problems where conventional sensors fail.

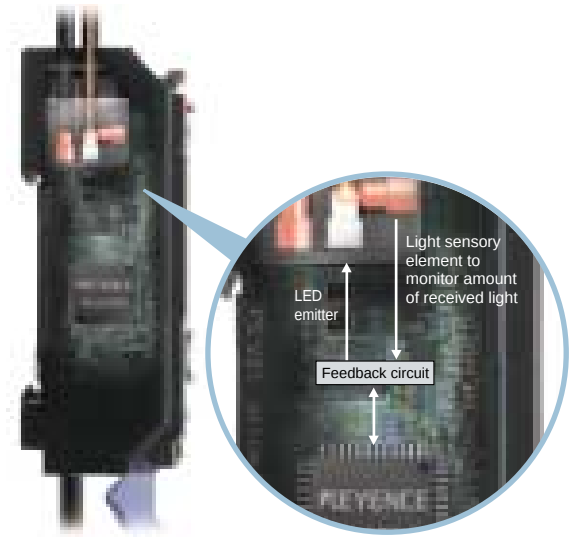

4-Element Red LED

New Technology

Conventional 3-element LED's characteristically lose brightness gradually with extended usage. This means the sensitivity is also decreasing little by little. However, Keyence's 4-element red LED features a longer service life without light emission deterioration.

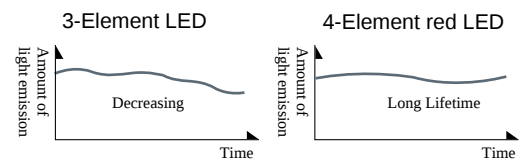

S-APC Function

Selectable

APC on

Ensures high-precision detection in clean environments.

Changes in temperature or environmental conditions may adversely affect high-precision detection. The S-APC (Selectable Auto-Power Control) feature maintains constant light emission by regulating current input to the light emission element.

S-APC Features

Maintaining constant light emission


Conventional models do not regulate light emission, leading to fluctuations in the amount of received light over a long period of time. The S-APC feature continuously monitors and corrects light emission.

S-APC may be deactivated

Since the S-APC feature is not required for typical use, the FS-V20 allows you to turn the S-APC function ON and OFF as necessary.

Ease of Forecast Maintenance and Troubleshooting


The END APC indicator for forecast maintenance will start flashing if an excessive load is imposed on the LED.

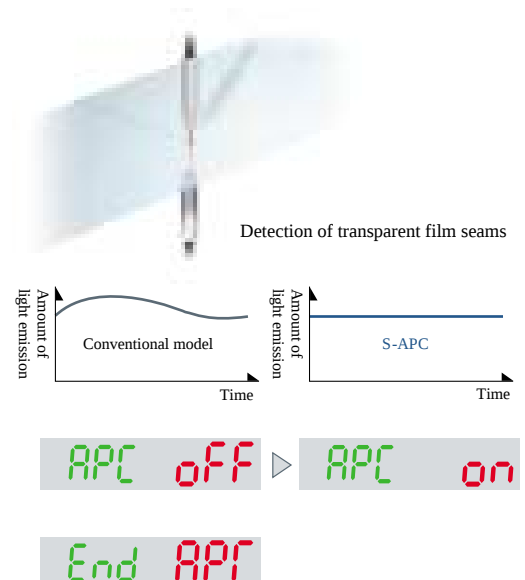

Simple Control and Display

Surpassing conventional control methods


The FS-V20 was designed in pursuit of higher functionality and performance while maintaining simple control and display features. Keyence's long history of fibreoptic sensor development enabled us to give the FS-V20 a unique balance of easy-to-use controls and features.

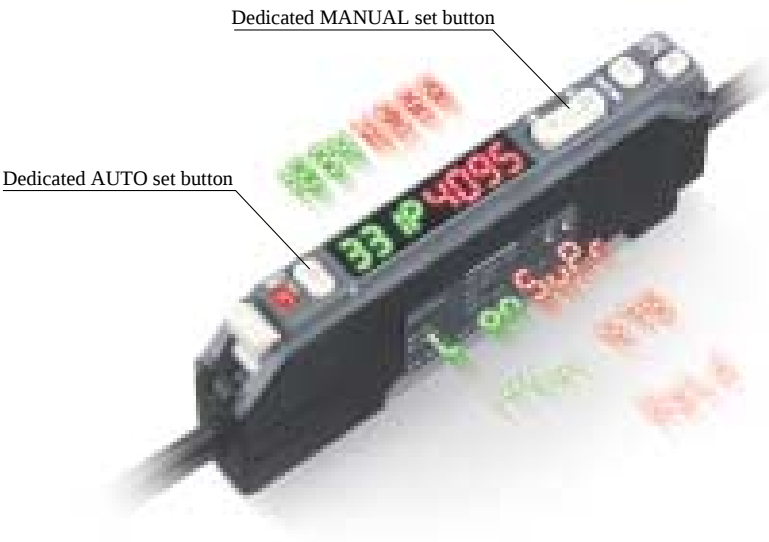

EASY Access

The EASY access setting is ideal for standard applications while the FULL access setting enables all selectable features.

All sensor manufacturers work to incorporate higher functionality and improved performance when developing new models. To these pursuits Keyence adds the quest for uniqueness. The EASY access setting makes it possible to skip a variety of functions and provide a simple display showing the power selection and timer setting modes only. (Patent pending.)

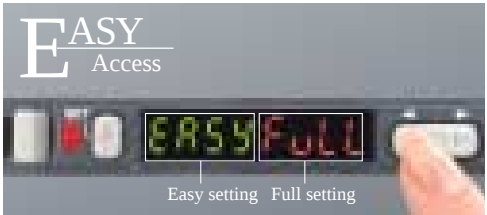

Full Access mode



EASY Access mode



Simple Sensitivity Settings


Allows direct settings and adjustments with no mode changes.

Fully Automatic Calibration


When detecting falling or minute targets, it is very difficult to make positive sensitivity adjustments under normal conditions. Fully automatic calibration is unique to the digital-type sensor, allowing you to generate a suitable sensitivity setting just by letting the sample target pass through the sensing area.

Maximum Sensitivity Settings


The sensitivity of the FS-V20 can be set to the maximum level without background detection. This feature makes it possible to set the sensitivity without detecting targets, while suppressing the influence of dust on sensor operation.

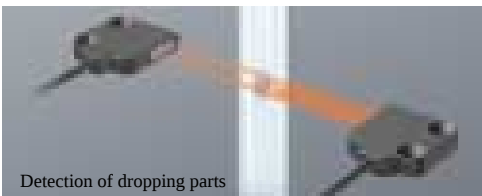

With background



Background is not detected




Sensor turns ON when the target enters the sensing area

Highly Reliable Expansion


Keyence's established 1-Line system is also featured on the FS-V20 Series

The sensor saves wiring with no accessories or additional man hours required. By supplying power through the connector on the side, each sensor will save two wires that are required when using conventional sensors.

Dedicated Expansion Connector for 1-Line System

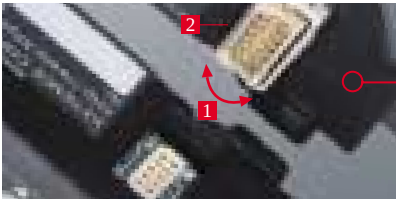

- 1 Shock absorber function incorporated**
The connector is provided with a spring mechanism for shock absorption.
- 2 Dust cover provided**
The dust cover prevents the exposure of the connector pins regardless of whether the expanded sensors are misaligned.

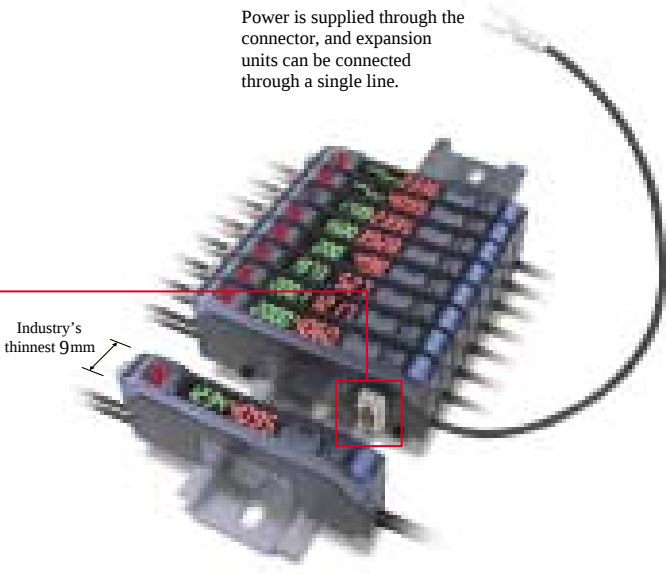

Power is supplied through the connector, and expansion units can be connected through a single line.

Use in Combination with Other Sensor Models

A full line of models showing proven results and high reliability.

It is possible to expand the scale of FS-V20 systems using other series of sensors in combination, provided that these sensors support the single-line method. When FS-V20 units are used for laser sensor timing adjustment, its interference prevention feature activates to prevent system failures.



From left to right
CZ-V1:
RGB Digital colour sensor
FS-V22R:
Dual digital
LV-22A:
Long-distance laser
PS-T2:
Photoelectric sensor with separate amplifier

Mutual Interference Prevention Function

Stable mutual interference prevention for precise detection

The FS-V20 Series electronically delays light emission timing when another sensor is connected. This allows for mutual interference prevention.

*Contact your local Keyence office for numbers of other models offering mutual interference prevention.

Mode	TURBO/SUPER/ULTRA	FINE
Number of models preventing mutual interference	8	4

1-Line Wire Connection System Significantly Reduces Wiring Time

Conventional method

Number of terminal blocks: 20
Number of wires: 58
Number of jumper wires: 8
Required working time: 120 min.

All red wires will be unnecessary.

Single-line method


Number of terminal blocks: 12
Number of wires: 24
Number of jumper wires: 0
Required working time: 50 min.

Merit of space saving

Wide Variety of Photoelectric Sensors

Sensor Variations for 1-Line Wire-Saving Connection System

Long Distance Digital Laser Optic Sensors LV Series

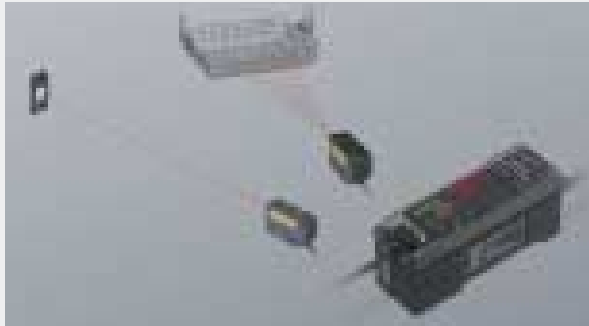


By using a semiconductor laser as the light source, the LV Series forms a sharp beam spot even at long distance.

RGB Digital Fibreoptic Sensors CZ Series



The CZ Series works using a RGB colour element, a detection method that is impossible using conventional light quantity receiving methods.

One-Touch Calibration Photoelectric Sensors PS01 Series

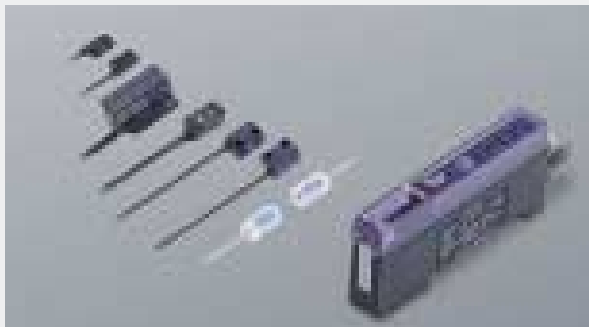

Long distance, small spot, Teflon®-sheathed a variety of sensor heads cover every application.

Combination of Main-unit and Expansion-unit

Main-units

Red LED
NEW

FS-V21R

Dual Display Digital Fibreoptic Sensor

Green LED
NEW

FS-V21G

Dual Display Digital Fibreoptic Sensor

FS-V1

2-output Fibreoptic Sensor

LV-21A

Laser Optic Sensor

CZ-V1

RGB Digital Sensor

PS-T1

Photoelectric Sensor

+

Expansion-units

Red LED
NEW

FS-V22R

Dual Display Digital Fibreoptic Sensor

Green LED
NEW

FS-V22G

Dual Display Digital Fibreoptic Sensor

LV-22A

Laser Optic Sensor

PS-T2

Photoelectric Sensor

Complete Line of Fibre Units

Select the type best suited to your application

ToughFlex

Armoured ToughFlex



A flexible stainless steel jacket protects the fibre from daily wear.

Reflective type: FU-67G
Thrubeam type: FU-77G

- Resists entanglement or shock
- More flexible than conventional spiral tubes
- Minimum bend radius: 10mm

Super ToughFlex

Multi-core Unit
613cores

Flexible wiring without any bending restrictions or optical attenuation.

Reflective type: FU-67V
Thrubeam type: FU-77V



The 613-core fibre (42µm dia.) is nearly impervious to excessive bending.



Super ToughFlex will not break even when sharply bent.

ToughFlex

Multi-core Unit
217cores

Easy to handle with a minimum bending radius of 2mm and minimal optical attenuation.

Reflective type: FU-67
Thrubeam type: FU-77



The 217-core fibre (66µm dia.) is hardly affected by excessive bending.



ToughFlex will not break even when sharply bent.

ToughFlex and Super ToughFlex fibre cores are used in many of Keyence's fibre units.




ULTRA Long Distance Detection



Reflective type: FU-61
Thrubeam type: FU-71


NEW

- ULTRA High-Power, resistant to dirty and dusty environment
- ULTRA Long detecting distance up to 900mm(FU-61), 1800mm(FU-71)
- Durable M6 stainless steel housing



Long detecting distance, high-power type
FU-40

- High-power reflective type resistant to dust
- Narrow-beam type for precise aiming at the target
- Armoured ToughFlex fibre unit is available (model: FU-40G)



Long detecting distance, entirely Teflon®-sheathed type

FU-92

- Usable in most environment due to its Teflon®-sheathed body.
- Resists oil and chemicals.


Area Detection



10 mm width area detection, thru-beam type

FU-12

- Even if the target vibrates, the 10 mm width detection area allows it to be detected stably.
- The minimum bend radius is 2mm thanks to the use of ToughFlex fibre.




15 mm width area detection, reflective type

FU-11

- The wide beam area ensures stable detection of targets that are difficult to detect.
- Its original optical system has realised a truly compact high-performance sensor.
- Combined with the FS-V20, the FU-11 eliminates mutual interference.


Small Beam Spot



Adjustable small beam spot type

FU-10


- The beam spot diameter is freely adjustable between 0.9 and 3.5 mm.
- Designed for easy installation and adjustment.



F-5HA

- Space-saving, side-view lens
- Produces a small beam spot at a long distance.
- The beam spot diameter is adjustable between 0.5 and 3.0 mm.

Thin Sleeve



Thin-sleeve, Thru-beam type

FU-75F

- Thin sleeve with a diameter of 0.82 mm
- Long detecting distance: 300mm

Space Saving




Ultra-thin, thru-beam type

FU-53TZ

- Thickness is only 2mm
- Uses a ToughFlex fibre

Narrow Beam




Long-distance, Side-view type

FU-16

- High-power unit with a side-view lens built in.
- Flexible fibre that can be laid out with ease.

High-Flex



High-flex, reflective type

FU-69X

- Provides higher flexibility than an electric wire.
- R4 models are resistant to repeated bends.

Definite-reflective




Long detecting distance, definite-reflective type

FU-38R

- Even a circuit board with deflection can be detected easily at a distance of 0 to 17 mm.

Heat Resistant Type




Heat resistant fibre type

FU-81C

- Resists temperatures up to 350°C
- Moreover, the fibre unit is protected with a spiral tube.


Liquid Level



ToughFlex tube-mountable liquid level detection type

FU-95Z

- Mountable to various tubes ranging from small to large diameters.
- Uses a ToughFlex fibre



ToughFlex immersion type liquid level detection type

FU-93Z

- Teflon®-sheathed immersion type
- Uses a ToughFlex fibre.

A Variety of Fibre Units

Thrubeam

(■ ULTRA TURBO ■ SUPER TURBO ■ TURBO ■ FINE ■ HIGH RESOLUTION ■ HIGH SPEED)

Type	Shape	Detecting distance ^{*1} [mm]		Smallest detectable object [mm] ^{*2}	Minimum bend radius [mm]	Features	Model			
Thrubeam	Standard	ULTRA TURBO, SUPER TURBO, TURBO, FINE		HIGH RESOLUTION, HIGH SPEED	ø0.005	R25	Long detecting distance	FU-5F 2m Free cut		
		1500(1000)		(130) (95)				FU-7F 2m Free cut		
		M4		320(250) 640(500) 760(640)			*3 Lens F-1, F-2, F-4, F-5		Ultra Long detecting distance	FU-71 2m Free cut NEW
		M6		450(360) 900(720) 1100(880) 1800(1500)			(180) (160)	FU-78 2m Free cut		
	ToughFlex	M4		150(120) 300(240) 370(300) 700(560)	*3 Lens F-1, F-2, F-4, F-5		ø0.005	R4	A minimum bend radius of 4 mm	FU-78 2m Free cut
		ø3						R2	ToughFlex	FU-5FZ 2m Free cut
		M4		230(180) 460(360) 570(450) 1200(960)				R0.5	Super ToughFlex	FU-77V 2m Free cut
		M4			*3 Lens F-1, F-2, F-4, F-5			R2	ToughFlex	FU-77 2m Free cut
	High-flex	ø1.5		100(80) 200(160) 220(175) 400(320)			ø0.005	R4	High-flex	FU-77G 1m Free cut
		M3								R10
	Thin-sleeve	ø0.82		75(60) 120(96) 150(120) 300(240)			ø0.005	R25	Long detecting distance, sleeve	FU-73 2m Free cut
		ø1.65		320(250) 640(500) 760(600) 1500(1000)						
	Side-view	10		60(48) 120(96) 150(120) 280(220)			ø0.005	R2	Thin, side-view	FU-51TZ 1m Free cut
		14		200(160) 400(320) 500(400) 1000(800)						
		2		40(32) 80(64) 100(80) 160(120)			ø0.005	R2	Ultra-thin, flat-ON	FU-53TZ 1m Free cut NEW
		4		200(160) 400(320) 500(400) 1000(800)						
		ø0.82 ø2.5		30(24) 60(48) 80(64) 200(160)			ø0.005	R25	Side-view, thin sleeve	FU-54TZ 2m Free cut NEW
		ø1.2 ø3		100(80) 200(160) 250(200) 400(320)						
		ø4		800(640) 1300(1000) 1700(1300) 3200(2600)			ø0.1	R10	Long detecting distance, side-view	FU-32 1m Free cut
				600(480) 800(640) 1000(800) 1200(960)						
Area detection	20 10		600(480) 800(640) 1000(800) 1200(960)			ø0.1	R2	Area detection	FU-34 2m Free cut	
Side-view	ø4		650(520) 1000(800) 1300(1000) 2000(1600)							

*1. Each detecting distance in parentheses shows the data when the S-APC function is ON. S-APC will be always turned ON when the high-resolution or high-speed mode is selected.













*2. The smallest detectable object was determined at the optimal detecting distance and sensitivity setting.

*3. Lenses can be attached only to screw-mount type heads.

*4. Detecting range varies depending on detecting distance and target diameter.

Thrubeam

(■ ULTRA TURBO ■ SUPER TURBO ■ TURBO ■ FINE ■ HIGH RESOLUTION ■ HIGH SPEED)

Type	Shape	Detecting distance ^{*1} [mm]		Smallest detectable object [mm] ^{*2}	Minimum bend radius (mm)	Features	Model
Thru-beam	Heat resistant	ULTRA TURBO, SUPER TURBO, TURBO, FINE		HIGH RESOLUTION, HIGH SPEED	R25	Heat resistance: 300°C, glass fibre	FU-84C
		 600(480) 370(300) 300(240) 150(120)		 (64) (60) Lens F-1, F-2			
		 1000(800) 700(560) 250(200) 500(400)		 (96) (90) Lens F-1, F-2, F-5			
		 1200(1000) 760(600) 640(500) 320(250)		 (130) (95) Lens F-1, F-2, F-5			
	 800(640) 500(400) 400(320) 200(160)		 (80) (80)				
	Oil-proof, chemical proof	 3600(2900) 2500(2000) 2200(1700) 1100(880)		 (440) (300)	R40	Teflon®-sheathed	FU-92
		 1800(1400) 870(700) 700(560) 350(280)		 (150) (100)		Teflon®-sheathed, side-view	FU-96

Reflective

(■ ULTRA TURBO ■ SUPER TURBO ■ TURBO ■ FINE ■ HIGH RESOLUTION ■ HIGH SPEED)

Type	Shape	Detecting distance ^{*1,3} [mm]		Smallest detectable object [mm] ^{*2}	Minimum bend radius [mm]	Features	Model
Reflective	Standard	ULTRA TURBO, SUPER TURBO, TURBO, FINE		HIGH RESOLUTION, HIGH SPEED	R25	Long detecting distance	FU-4F
		500(400)		(40) (40)			FU-6F
		900(720)		(60) (60)		Ultra Long detecting distance	FU-61
		500(400)		(40) (40)		Long detecting distance	FU-66
	Coaxial	500(400)		(40) (40)	R25	Suitable for positioning	FU-23X
		480(380)		(32) (32)			FU-25
		220(176)		(12) (12)		0.2 mm spot diameter with F-2HA	FU-21X
		220(176)		(12) (12)		0.4 mm spot diameter with F-2HA	FU-35FA
	ToughFlex	260(200)		(16) (16)	R2	ToughFlex	FU-4FZ
		360(280)		(24) (24)			FU-66Z
		360(280)		(24) (24)	R0.5	Super ToughFlex	FU-67V
		360(280)		(24) (24)		ToughFlex	FU-67
		360(280)		(24) (24)	R10	Armoured ToughFlex	FU-67G
		360(280)		(24) (24)			
		360(280)		(24) (24)	R2	Ultra-thin, flat-ON	FU-41TZ
		360(280)		(24) (24)			
		30 to 1000		(30 to 800)	R2	Narrow beam (8°)	FU-40
		30 to 1000		(30 to 800)			

*1. Each detecting distance in parentheses shows the data when the S-APC function is ON. S-APC will be always turned ON when the high-resolution or high-speed mode is selected.

*2. The smallest detectable object was determined at the optimal detecting distance and sensitivity setting.

*3. Standard target: White matt paper

*4. 3600 is assumed as maximum because the fibre cable has the length of 2m.

Reflective

(■ ULTRA TURBO ■ SUPER TURBO ■ TURBO ■ FINE ■ HIGH RESOLUTION ■ HIGH SPEED)

Type	Shape	Detecting distance ^{*1 *2} [mm]		Smallest detectable object [mm] ^{*3}	Minimum bend radius [mm]	Features	Model			
ToughFlex		130(100) 65(52) 45(36) 25(20)		 (10) (10) Lens F-2HA, F-3HA, F-4HA, F-5HA, F-6HA	ø0.005 (gold wire)	 R2	Coaxial, ø0.4 mm spot using F-2HA	FU-35FZ  2m Free cut		
						 R10	Coaxial with ø0.4 mm spot using F-2HA Armoured	FU-35FG  1m Free cut		
	Min. bend radius of sleeve: 10 mm		90(70) 45(36) 35(28) 20(16)		 (8) (8)	ø0.005 (gold wire)	 R2	Thin sleeve ToughFlex	FU-63Z  2m Free cut	
	High-flex		110(90) 55(44) 40(32) 25(20)		 (8) (8)	ø0.005 (gold wire)	 R4	High-Flex	FU-48  2m Free cut	
				FU-68  2m Free cut						
		50(40) 25(20) 20(16) 15(12)		 (4) (4)	FU-49X  1m					
					FU-69X  1m					
Thin-sleeve	Do not bend sleeve. 	36(30) 12(10) 10(8) 8(6)		—	ø0.005 (gold wire)	 R4	Narrow-beam, small- beam spot	FU-22X  50cm		
	Do not bend sleeve. 	28(22) 14(11) 10(8) 6(5)		—				Flush-mount, thin-sleeve	FU-45X  50cm	
	Do not bend sleeve. 								FU-65X  50cm	
	Do not bend sleeve. 	120(100)						Flush-mount, sleeve	FU-43  2m Free cut	
	Min. bend radius of sleeve: 10 mm 	70(56) 50(40) 30(24)		 (12) (12)					Screw-mount	FU-63  2m Free cut
	Min. bend radius of sleeve: 10 mm 									Long-sleeve, Flat type
Side-view	Min. bend radius of sleeve: 25 mm 	120(96) 60(48) 40(32) 20(16)		 (8) (8)	ø0.005 (copper wire)	R25	Long-sleeve	FU-33  50cm		
	Do not bend sleeve. 	54(43) 27(22) 20(16) 13(10)		 (4) (4)	 R10	Compact	FU-31  2m Free cut			
Area detection	Thickness: 7mm 	5 to 160(5 to 130) 5 to 90(5 to 72)		 (5 to 36) (5 to 36)	ø0.005 (gold wire)	R25	Area detection	FU-11  2m Free cut		
Definite-reflective		3 (Centre of detecting distance)		(3) (Centre of detecting distance)	ø0.005 (gold wire)	 R10	Almost unaffected by target colour and background	FU-37  2m Free cut		
		6 (Centre of detecting distance)		(6) (Centre of detecting distance)				FU-38  2m Free cut		
		0 to 4(0 to 4)		—	ø0.08 (copper wire)			Almost unaffected by target colour and background, side-by- side detection available	FU-38V  2m Free cut	
		0 to 14(0 to 14)		 (0 to 14)	ø0.3 (copper wire)			R25	Almost unaffected by target colour and background, long detecting distance	FU-38R  2m Free cut

*1. Each detecting distance in parentheses shows the data when the S-APC function is ON. S-APC will be always turned ON when the high-resolution or high-speed mode is selected.








*2. Standard target: White matt paper.

*3. The smallest detectable object was determined at the optimal detecting distance and sensitivity setting.

*4. FU-11 cannot be used in ULTRA Turbo mode.

Reflective

(■ ULTRA TURBO ■ SUPER TURBO ■ TURBO ■ FINE ■ HIGH RESOLUTION ■ HIGH SPEED)

Type	Shape	Detecting distance ^{*1,2} [mm]		Smallest detectable object [mm] ^{*3}	Minimum bend radius [mm]	Features	Model
Reflective		Transparent tube of 4 to 26 mm dia.	—	—	R2	For mounting to a tube	FU-95Z 2m Free cut
					R10		FU-95 2m Free cut
		Liquid (except for milky white liquids)	—	—	R0.5 ^{*4}	Liquid level detection by sensor head immersion. Teflon®-sheathed	FU-93Z 2m Free cut
					R25 ^{*4}		FU-93 2m Free cut
		Liquid (except for milky white liquids)	—	—	R40 ^{*5}	Liquid level detection by sensor head immersion. Teflon® covered for high durability against chemicals. FU-94C heat resistant up to 200°C	FU-94C 2m
		360(280) 180(140) 120(100) 60(50)	(24) (20)	ø0.005 (gold wire)	R25	Heat-resistance: 350°C, glass fibre with sleeve	FU-81C 1m
		420(340) 210(160) 140(110) 70(55)	(28) (25)			Heat-resistance: 300°C, glass fibre with sleeve	FU-82C 1m
		360(280) 180(140) 130(100) 65(50)	(24) (24)			Heat-resistance: 300°C, glass fibre	FU-83C 1m
		500(400) 300(240) 200(160) 100(80)	(40) (40)	ø0.005 (gold wire)	R25	Heat-resistance: 100°C, plastic fibre	FU-85Z 2m Free cut
		420(340) 210(170) 140(110) 70(55)	(28) (25)			Heat-resistance: 105°C, plastic fibre	FU-85 2m Free cut
						Heat-resistance: 180°C, plastic fibre	FU-87 2m Free cut
		220(180) 110(90) 85(70) 60(50)	(24) (23)	ø0.005 (gold wire)	R40	Teflon®-sheathed	FU-91 2m Free cut
		5±1 with beam spot diameter of 0.1 mm	—	—	R25	Minute target detection, Space saving	FU-20 50cm
		10 mm to 30 mm with beam spot diameter of ø0.9 to ø3.5 mm	—	—	R25	Beam spot can be adjusted according to target size.	FU-10 2m Free cut

*1. Each detecting distance in parentheses shows the data when the S-APC function is ON. S-APC will be always turned ON when the high-resolution or high-speed mode is selected.

*2. Standard target: White matt paper.

*3. The smallest detectable object was determined at the optimal detecting distance and sensitivity setting.

*4. The minimum bend radius of the Teflon-sheathed section is R40mm.

*5. The 80-mm section from the tip cannot be bent.

Lens for Thrubeam type

(■ ULTRA TURBO ■ SUPER TURBO ■ TURBO ■ FINE ■ HIGH RESOLUTION ■ HIGH SPEED)

Type	Configuration	Applicable fibre units	Detecting distance *1 [mm]		Features	Model	
			ULTRA TURBO, SUPER TURBO, TURBO, FINE	HIGH RESOLUTION, HIGH SPEED			
Thrubeam	Side-view		FU-7F,86	1600(1300) 1000(800) 800(640) 400(320)	(160) (130)	Space-saving, side-view type	F-1*2 Heat resistance: 70°C
			FU-86Z	1200(960) 750(600) 600(480) 300(240)	(120) (110)		
			FU-77,77V	1040(830) 670(530) 540(430) 260(200)	(100) (90)		
			FU-78	880(700) 550(440) 440(360) 220(180)	(85) (80)		
			FU-84C				
	Narrow-beam, side-view type		FU-7F,86	3600(3600) 3600(3600) 2400(1900)	(960) (850)	Narrow-beam, side-view type	F-5 Heat resistance: 105°C
			FU-86Z	3600(3600) 3600(3600) 2000(1600)	(800) (700)		
			FU-77,77V,78	3600(3600) 3600(3600) 1800(1400)	(720) (600)		
	Long detecting distance		FU-7F,86	3600(3600) 3600(3400) 1800(1400)	(720) (650)	Greatly increases the detecting distance. Aperture angle: 15°	F-2 Heat resistance: 300°C
			FU-86Z	3600(3600) 3600(3000) 1600(1300)	(640) (550)		
			FU-77,77V	3600(3600) 3600(2800) 3000(2400)	(600) (500)		
			FU-84C	1500(1200)			
			FU-78	3600(3600) 3000(2400) 2400(1900) 1200(950)	(480) (400)		
	Ultra-long detecting distance		FU-7F	3600(3600) 3600(3600) 3600(3600) 3000(2400)	(1200) (1000)	Greatly increases the detecting distance. Aperture angle: 8°	F-4 Heat resistance: 70°C
			FU-77,77V	3600(3600) 3600(3600) 3600(3600) 2500(2000)	(1000) (800)		
			FU-78	3600(3600) 3600(3600) 3600(3200) 2000(1600)	(800) (650)		

*1. Each detecting distance in parentheses shows the data when the S-APC function is ON. S-APC will be always turned ON when the high-resolution or high-speed mode is selected.

*2. When using the F-1 at a temperature of 70°C or more, specify the "Heat-resistant F-1".

*3. "3600" is assumed as maximum because the fibre cable has the length of 2m.

Lens for Reflective type

(■ ULTRA TURBO ■ SUPER TURBO ■ TURBO ■ FINE ■ HIGH RESOLUTION ■ HIGH SPEED)

Type	Configuration	Applicable fibre units	Detecting distance *1 *2 [mm]		Beam spot diameter	Model	
Reflective	Focusing lens	FU-35FA FU-35FZ	7±2(7±2) 7±2(7±2) 7±2(7±2)	(7±2)	0.4mm	F-2HA ^{*3}	
		FU-21X	7±2(7±2) 7±2(7±2) 7±2(7±2)	—	0.2mm		
	Long detecting distance, high focusing lens	FU-35FA FU-35FZ	15±2(15±2) 15±2(15±2) 15±2(15±2) 15±2(15±2) 15±2(15±2)	(15±2) (15±2)	0.5mm	F-4HA	
		Long detecting distance, high focusing lens	FU-35FA	65(52) 55(44) 45(36)	(12) (12)	0.4mm (within the detecting of 0 to 20mm)	F-3HA ^{*3}
	FU-35FZ		35(28) 30(24) 25(20)	(10) (10)			
	Adjustable beam spot, side-view	8.6 15 Thickness: 5.6 mm	FU-35FA FU-35FZ	8 to 30(8 to 30) 8 to 30(8 to 30) 8 to 30(8 to 30)	—	0.5 to 3.0mm	F-5HA ^{*3}
			FU-21X	8 to 30(8 to 30) 8 to 30(8 to 30) 8 to 30(8 to 30) 8 to 30(8 to 30)	—		
Long detecting distance, focusing lens	Front edge Ø10.6	FU-35FA FU-35FZ FU-21X	35±3(35±3) 35±3(35±3) 35±3(35±3) 35±3(35±3)	(35±3) (35±3)	2.0mm(with FU-35FA/35FZ) 1.0mm(with FU-21X)	F-6HA	

*1. Each detecting distance in parentheses shows the data when the S-APC function is ON. S-APC will be always turned ON when the high-resolution or high-speed mode is selected.

*2. Standard target: White matt paper.

*3. F-2HA/3HA/5HA cannot be used in ULTRA Turbo mode. (except F-5HA with FU-21X)

Specifications

Type		Main unit		1-line expansion unit		0-line expansion unit
Model	NPN	FS-V21R	FS-V21G	FS-V22R	FS-V22G	FS-V20R
	PNP	FS-V21RP	-	FS-V22RP	-	-
Light source		Red LED	Green LED	Red LED	Green LED	Red LED
Response time		250μs (FINE)/500μs (TURBO)/1ms (SUPER TURBO)/4ms (ULTRA TURBO)/500μs (HIGH RESOLUTION)/50μs (HIGH SPEED)				
Output selection		Light-ON/Dark-ON selectable				
Display indicator		• Operation indicator: Red LED • Dual digital monitor: Dual 7-segment display Preset Value (4-digit green LED indicator) and Current Value (4-digit red LED indicator) illuminated together. Current Value range: 0 to 65520; Excess gain: 0P to 999P • Hold function: Possible to display both peak and bottom hold values. • Bar LED monitor: Possible to display together with Current Value Excess gain displayed (85% to 115% in 7 steps)				
Detection mode		Light intensity/rising edge/falling edge				
Display shift function		Max. ±1999 (variable)				
Timer function	Mode	Timer OFF/OFF-delay timer/ON-delay timer/One-shot timer, selectable				
	Variable range	1 to 500ms $\left[\begin{array}{l} 1 \text{ to } 30\text{ms (in 1ms increments)}, 30 \text{ to } 50\text{ms (in 2ms increments)}, 50 \text{ to } 200\text{ms (in 10ms increments)}, \\ 200 \text{ to } 500\text{ms (in 50ms increments)} \end{array} \right]$				
	Accuracy	±10% of the Preset Value				
Control output		NPN or PNP 100 mA max. (40VDC max), Residual voltage : 1Vmax.				
Power supply		12 to 24VDC ±10% , ripple: 10% max.				
Current consumption*1	Normal	S-APC OFF: 650 mW max. (27mA max. at 24VDC) , S-APC ON: (720mA max. at 24VDC)				
	ECO half	S-APC OFF: 530 mW max. (22mA max. at 24VDC) , S-APC ON: (600mA max. at 24VDC)				
	ECO all	S-APC OFF: 480 mW max. (20mA max. at 24VDC) , S-APC ON: (550mA max. at 24VDC)				
Ambient illumination		Incandescent lamp: 20,000 lux max. , Sunlight: 30,000 lux max.				
Ambient temperature*2		-10°C to 55°C , No freezing				
Relative humidity		35 to 85%, No condensation				
Vibration		10 to 55 Hz, 1.5-mm double amplitude, each in X, Y, and Z directions for two hours				
Shock resistance		500 m/s ² Three times each in X, Y, and Z directions				
Housing		Polycarbonate				
Weight (including 2-m cable)		Approx. 80 g		Approx. 45 g		Approx. 30 g


*1. S-APC will be always turned ON when the high-resolution or high-speed mode is selected. S-APC is by default set to OFF in any other mode.

*2. If more than one unit is used together, the ambient temperature varies with the conditions below. Mount the units on the DIN rail with mounting brackets and check that the output current is 20 mA or less.
 3 to 10 Units: -10°C to 50°C 11 to 16 Units: -10°C to 45°C


I/O Circuit

NPN

FS-V21R/FS-V21G

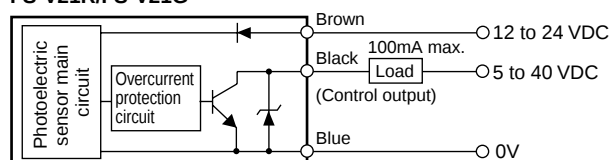


FS-V22R/FS-V22G

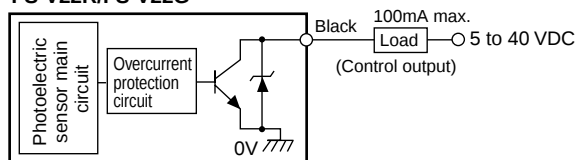


PNP

FS-V21RP

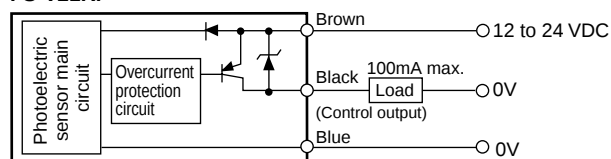

FS-V22RP

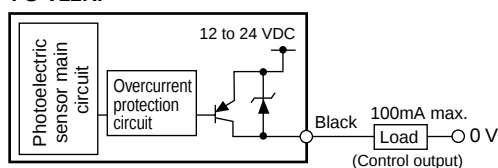

FS-V21G and FS-V22G Detecting Distance

Model	ULTRA TURBO	SUPER TURBO	TURBO	FINE	HIGH RESOLUTION	HIGH SPEED
FU-7F	220	110	80	50	15	20
FU-77 (V)	190	95	70	45	10	15
FU-6F	80	40	30	20	—	6
FU-67 (V)	40	20	15	10	—	4
FU-35FZ	24	12	8	5	—	—
FU-22X	9	6	4	—	—	—
FU-10	10 to 30*		—	—	—	—

* The beam spot diameter is variable between 0.9 and 3.5 mm.

(mm)


With Lens

Model	Fibre Unit	ULTRA TURBO	SUPER TURBO	TURBO	FINE	HIGH RESOLUTION	HIGH SPEED
F-1	FU-77 (V)	240	120	90	50	10	15
F-2		1400	700	500	350	80	120
F-4		2000	1000	750	500	100	150
F-2HA	FU-35FA(Z)(G)	7±2				—	—
	FU-21X	7±2	—	—	—	—	—
F-3HA	FU-35FZ(G)	35	25	20	15	—	—


Dimensions

unit: mm


FS-V21R(P)/FS-V21G

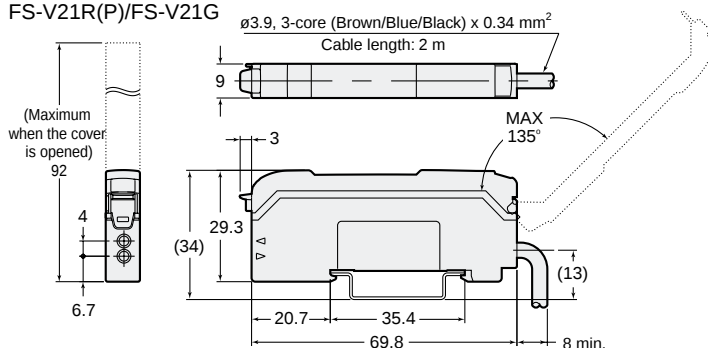


When the mounting bracket (included in the FS-V21R(P)/FS-21G) is attached:

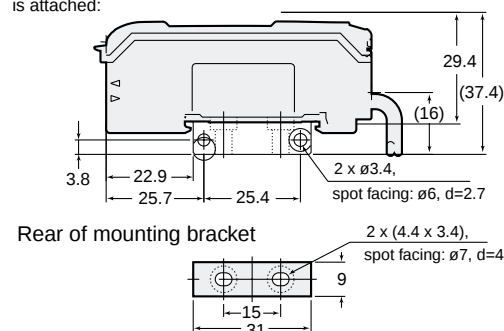


FS-V22R(P)/FS-V22G/FS-V20R

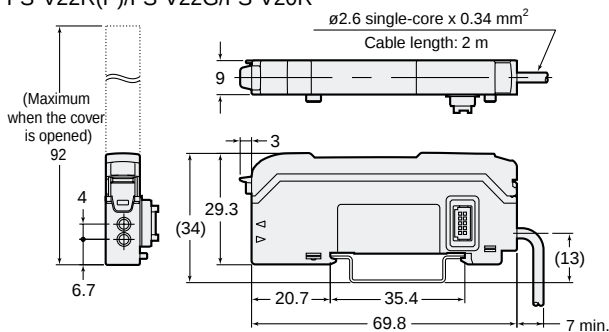

End unit (included in the FS-V22R(P)/FS-V22G)



When several units are connected:

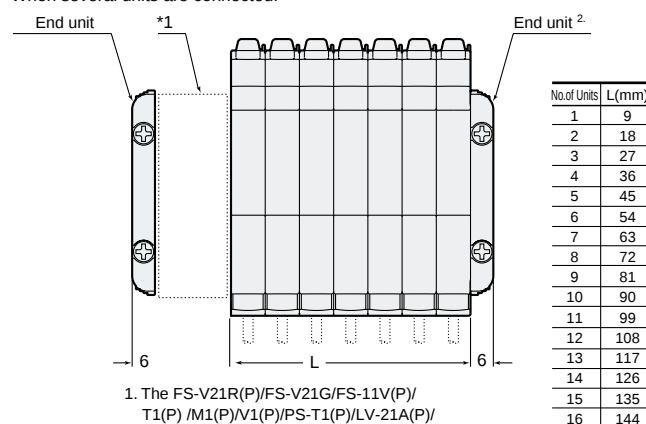

1. The FS-V21R(P)/FS-V21G/FS-11V(P)/T1(P) /M1(P)/V1(P)/PS-T1(P)/LV-21A(P)/CZ-V1(P) is mounted in ' ' (The PNP models cannot be connected to the NPN models.)
2. When using expansion units, be sure to use the end unit (accessory to the expansion unit).

Visit our website for other Keyence products at world.keyence.com

Specifications are subject to change without notice.

KEYENCE

KEYENCE CORPORATION
1-3-14, Higashi-Nakajima, Higashi-Yodogawa-ku,
Osaka, 533-8555, Japan
Phone: 81-6-6379-2211 Fax: 81-6-6379-2131

KEYENCE CORPORATION OF AMERICA
Phone: 201-930-0100 Fax: 201-930-0099

KEYENCE DEUTSCHLAND GmbH
Phone: 06102-36 89-0 Fax: 06102-36 89-100

KEYENCE (UK) LIMITED
Phone: 01908-696900 Fax: 01908-696777

KEYENCE FRANCE S.A.
Phone: 01 47 92 76 76 Fax: 01 47 92 76 77

KEYENCE SINGAPORE PTE LTD
Phone: 6392-1011 Fax: 6392-5055

KEYENCE (MALAYSIA) SDN BHD
Phone: 03-252-2211 Fax: 03-252-2131

KEYENCE (THAILAND) CO., LTD
Phone: 02-369-2777 Fax: 02-369-2775

KEYENCE TAIWAN CO., LTD
Phone: 02-2627-3100 Fax: 02-2798-8925

KEYENCE (HONG KONG) CO., LTD
Phone: 3104-1010 Fax: 3104-1080

KEYENCE INTERNATIONAL TRADING (SHANGHAI) CO., LTD.

Phone: 021-68757500 Fax: 021-68757550

KEYENCE KOREA CORPORATION
Phone: 02-563-1270 Fax: 02-563-1271