



Description & Features:

- Small diameter, all stainless steel gauge
- 1.5" (40mm) and 2" (50mm) dials
- Full view snap-in lens
- Back and bottom connection
- CRN registered
- 5 year warranty

Applications:

- Regulators, valve positioners and actuators that require a reliable and corrosion-resistant pressure gauge


Specifications	
Dial	1.5" (40mm), 2" (50mm) white aluminum with black and red markings
Case	304 SS
Lens	Acrylic, push-in type
Socket	316 SS
Connection	1/8" NPT or 1/4" NPT standard
Bourdon Tube	316 SS
Movement	304 SS
Pointer	Aluminum, painted black
Welding	Silver alloy
Over-Pressure Limit	25% of full scale value
Working Pressure	Maximum 75% of full scale value
Ambient/Process Temperature	-40°F to 150°F (-40°C to 65°C)
Accuracy	±2.5% of full scale value
Enclosure Rating	IP52

Order Codes (products in bold are normally in stock)


Dial Size	1.5" (40mm)		2" (50mm)			
Connection	1/8" NPT Bottom	1/8" NPT Centre Back	1/8" NPT Centre Back	1/4" NPT Centre Back	1/8" NPT Bottom	1/4" NPT Bottom
30" Hg. vacuum/kPa	-	-	-	-	-	-
30"/0/15 psi/kPa	-	-	-	PRL026	-	PRL017
30"/0/30 psi/kPa	-	-	-	-	-	-
30"/0/60 psi/kPa	-	-	-	PRL027	-	PRL018
30"/0/100 psi/kPa	-	-	-	PRL028	-	PRL019
30"/0/160 psi/kPa	-	-	-	PRL029	-	PRL020
0 - 15 psi/kPa	-	-	-	-	-	-
0 - 30 psi/kPa	PRL001	PRL005	PRL013	PRL030	PRL009	PRL021
0 - 60 psi/kPa	PRL002	PRL006	PRL014	PRL031	PRL010	PRL022
0 - 100 psi/kPa	PRL003	PRL007	PRL015	PRL032	PRL011	PRL023
0 - 160 psi/kPa	PRL004	PRL008	PRL016	PRL033	PRL012	PRL024
0 - 200 psi/kPa	-	-	-	-	-	-
0 - 300 psi/kPa	-	-	-	-	-	-
0 - 400 psi/kPa	-	-	-	-	-	-
0 - 600 psi/kPa	-	-	-	PRL034	-	-
0 - 1,000 psi/kPa	-	-	-	-	-	-
0 - 2,000 psi/kPa	-	-	-	-	-	-
0 - 3,000 psi/kPa	-	-	-	PRL035	-	PRL025

Other ranges and connection sizes available upon request. For scale change, refer to How to Order Guide for scale codes.


1.5" Back Connection

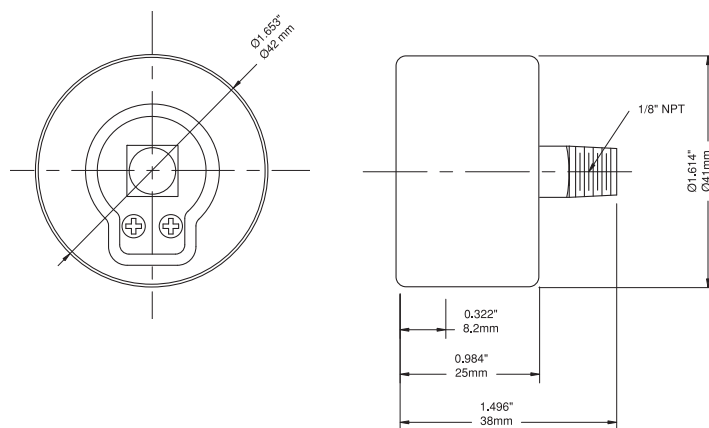

1.5" Bottom Connection

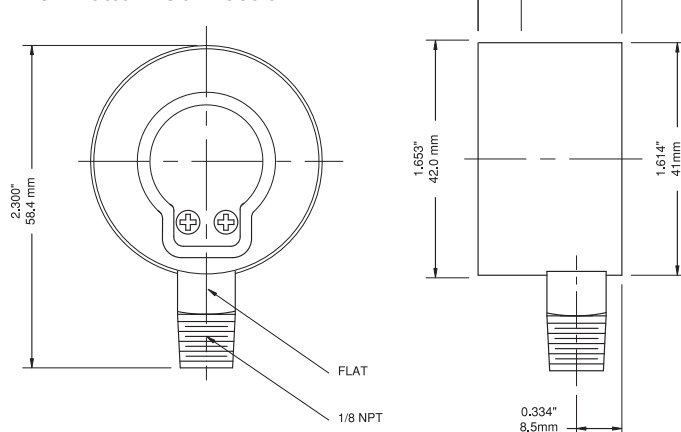

2" Back Connection

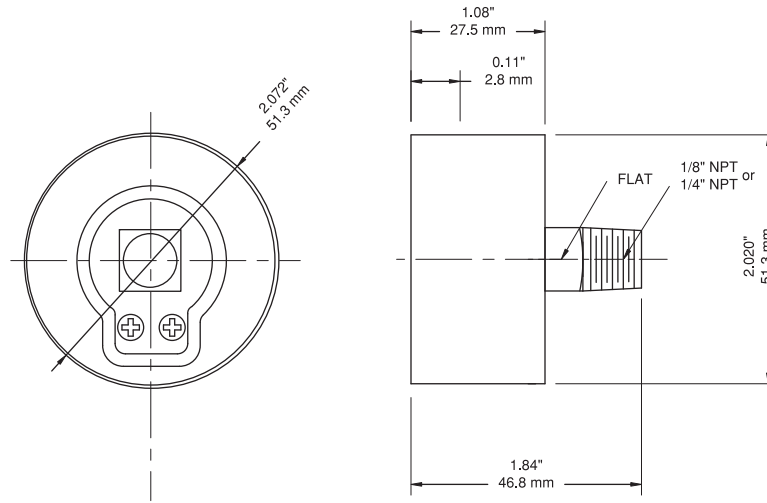

2" Bottom Connection

