# Altitude Gauge

PAL



### **Description & Features:**

- Premium aluminum case gauge designed to read head
  pressure
- Stainless steel or brass wetted parts
- PSI and Feet of Water scales
- CRN registered
- 5 year warranty

## **Applications:**

- Used to indicate liquid level in tank or stand pipe, etc.
- Economical alternative for level measurement

Specifications	Stainless Steel Internals	Brass Internals	
Dial	4.5" (115mm)	4.5" (115mm)	
Case	Aluminum painted black	Aluminum painted black	
Front Flange	SS, polished	SS, polished	
Back Flange	Steel, painted black	Steel, painted black	
Lens	Glass	Glass	
Ring	SS, polished	SS, polished	
Socket	316L SS	Brass	
Connection	1/4" NPT or 1/2" NPT standard	1/4" NPT or 1/2" NPT standard	
Bourdon Tube	316L SS	Phosphor bronze	
Movement	SS	Brass	
Pointer	Aluminum, anodized black, micrometer adjustable	Aluminum, anodized black, micrometer adjustable	
Welding	316L SS TIG Argonarc	Tin/copper alloy	
<b>Over-Pressure Limit</b>	30% of full scale value	30% of full scale value	
Working Pressure	Maximum 75% of full scale value	Maximum 75% of full scale value	
Ambient/Process Temperature	-40°F to 150°F (-40°C to 65°C)	-40°F to 150°F (-40°C to 65°C)	
Accuracy	±0.5% ANSI/ASME Grade 2A	±0.5% ANSI/ASME Grade 2A	
Enclosure Rating	IP52	IP52	

### **Order Codes**


Dial Size	4.5" (115mm)	
Movement, Btm Socket, Tube	Brass	SS
0-35 ft/water	PAL6008ALT	PAL6033ALT
0-70 ft/water	PAL6009ALT	PAL6034ALT
0-140 ft/water	PAL6010ALT	PAL6035ALT
0-230 ft/water	PAL6011ALT	PAL6036ALT
0-370 ft/water	PAL6012ALT	PAL6037ALT
0-460 ft/water	PAL6013ALT	PAL6038ALT
0-690 ft/water	PAL6014ALT	PAL6039ALT

Other ranges, units, connection sizes, dial sizes and gauge types available upon request. For options, attach suffix to end of order code: i.e. PAL6036ALT-B for BACK CONNECTION. Front flange is standard on all back connection models

#### **Option suffix:**

300BF = Back flange B = Back connection MAXI45 = Maximum adjustable pointer available MS = Monel<sup>®</sup> socket and tube OST = Over stop protection SFC = Solid front safety case SG-45 = Safety glass lens UST = Under stop protection

### 4.5" Bottom Connection with Standard Back Flange

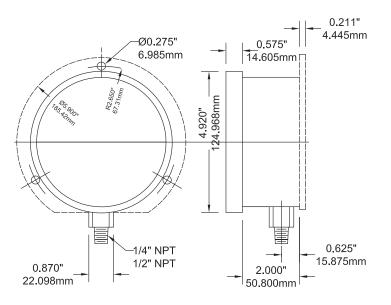

Monel® is a registered trademark of Inco Alloys International

96