



0-4,000 psi/kPa

**Description & Features:**

- Economical, non-sparking brass case gauge
- 2" (50mm) and 2.5" (63mm) brass case
- UL Listing on the 4,000 psi range
- "USE NO OIL" on dial
- Brass socket
- Threaded-on plastic lens
- CRN registered
- 5 year warranty

Applications:

- Welding tank regulators or manifolds, beverage dispensing regulators and other pressurized tanks
- Used on the down stream side of a regulator and the high pressures are UL Listed for measuring cylinder gases

Specifications

Dial	2" (50mm), 2.5" (63mm) white aluminum with black and red markings
Case	Brass, polished
Lens	Plexiglass
Ring	Brass, polished
Socket	Brass
Connection	1/4" NPT standard, bottom
Bourdon Tube	Phosphor bronze
Movement	Brass
Pointer	Aluminum, painted black
Welding	Silver alloy
Over-Pressure Limit	25% of full scale value
Working Pressure	Maximum 75% of full scale value
Ambient/Process Temperature	-40°F to 150°F (-40°C to 65°C)
Accuracy	±3-2-3% ANSI/ASME Grade B
Enclosure Rating	IP52


Note: Also see Compressed Gas Gauge for more choices

Order Codes (products in bold are normally in stock)

Dial Size	2" (50mm)	2.5" (63mm)
0-30 psi	PWL2720	PWL2820
0-100 psi	PWL2722	PWL2822
0-200 psi	PWL2724	PWL2824
0-400 psi	PWL2726	PWL2826
0-4,000 psi	PWL2732	PWL2832

Other ranges and connection sizes available upon request. For scale change, refer to How to Order Guide for scale codes.

2" Bottom Connection

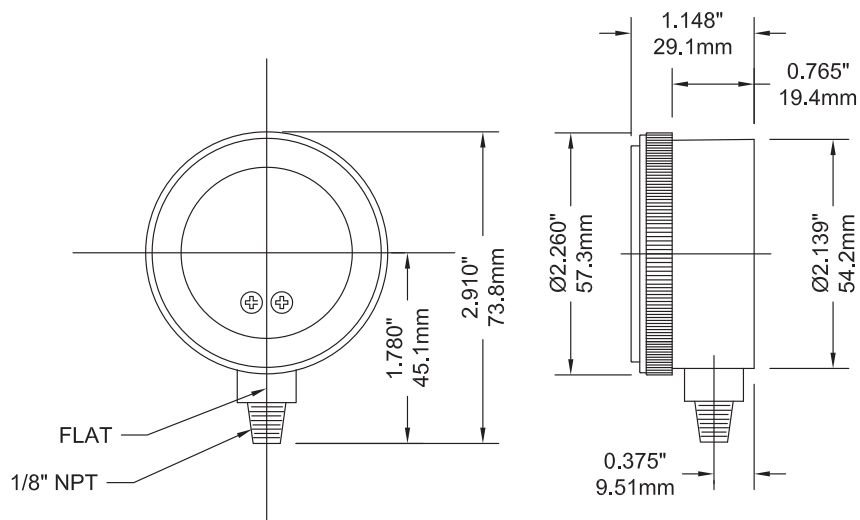

2.5" Bottom Connection

